

ULAB T5-HO

Fixture Type

Approved By

- *Designed For Quick Installation*
- *Instant On - Immediate Re-Strike*
- *High Color Rendition 80+ CRI*
- *3000K to 6500K Color Temperatures*
- *Programmed Start Ballasts*
- *Ideal For Side Lighting Applications*

Applications: THEATERS - AUDITORIUMS

Designed to be used as an architectural wall or ceiling mounted floodlight, the ULAB provides a wide range of lighting solutions in an easy install and aim package. With the ability to illuminate an area from the sides rather than the top makes this energy efficient light source unique to the industry. This fixture is UL listed with many options available to help meet specific project needs.

Construction: All fixtures 100% Bench Tested

Housing: .032" Black Powder Coated Aluminum

Sockets: Rotor Locking Mini Bi-Pin

Brackets: .090" Black Powder Coated Aluminum

Reflector: *Designed Specifically for Application:*

Mirro4: 95% Reflectance Anodized .020" Alum. (Med. To High Mount)

White 91: 91% Reflectance White .020" Alum. (Low Mount)

MirroMatte: White Specular (Med. To High Mount) *New!*

Lens: A-12 Prismatic (Standard)

Lamp: T5-HO 54-Watt - Instant Re-Strike - 5000 Lumens


Ballasts: Programmed Start T5-HO (Available 120-480V)

Normal Temp 40-125°F / Extreme High Temp 20-160°F (Must Specify)

Warranty: Ballast: 5 Years

Lamp: 20,000 Hours **Reflector:** 25 Years

Body: 5 Years **Motion Sensor:** 5 Years

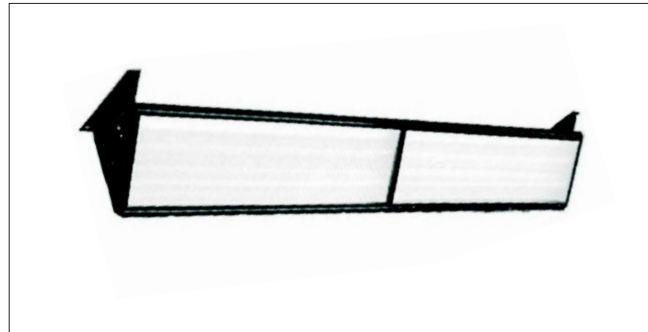

Input Watts

2x54 (2 Lamp)
117 Watts
4x54 (4 Lamp)
234 Watts

Dimensions

8 Ft 4x54 (Pictured)
Length = 96.50" Width = 10.375" Height = 11"
4 Ft 2x54
Length = 48.25" Width = 10.375" Height = 11"


Controls / Options

- **Emergency Ballast:** Specify Type
- **Dimming Ballast:** Specify # of Lamps
- **A/B Switching:** Specify # of Lamps
- **Lens Frame:** .125" Clear Acrylic, A-12 Prismatic or Tempered Glass
- **Wire Guard:** Durable 14 Gauge Steel
- **Colors :** Black, White, Dark Bronze (Powder Coat) (Custom Colors May Be Available)

Standard Cord & Plugs



NEMA 5-15P = 120V Plug
NEMA L5-15P = 120V Twistlock
NEMA L7-15P = 277V Twistlock
NEMA L7-20P = 277V Twistlock
Standard SO cord length 3-6 ft

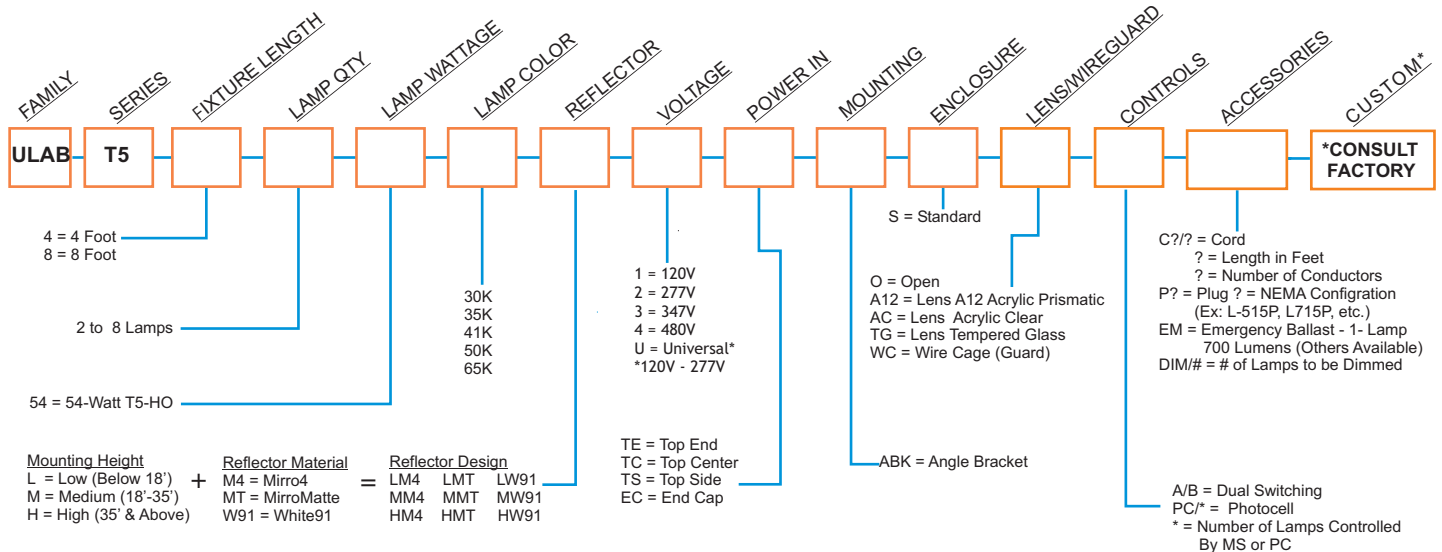

For further information, please call 530-887-1110 or email us at sales@1stsourcelight.com. We specialize in replacing all HID lighting systems with fluorescent. Contact us for a free quotation.

