


- *Designed For Quick Installation*
- *Instant On - Immediate Re-Strike*
- *High Color Rendition 80+ CRI*
- *3000K to 6500K Color Temperatures*
- *Instant Start -High Ballast Factor*
- *Ideal For Side Lighting Applications*

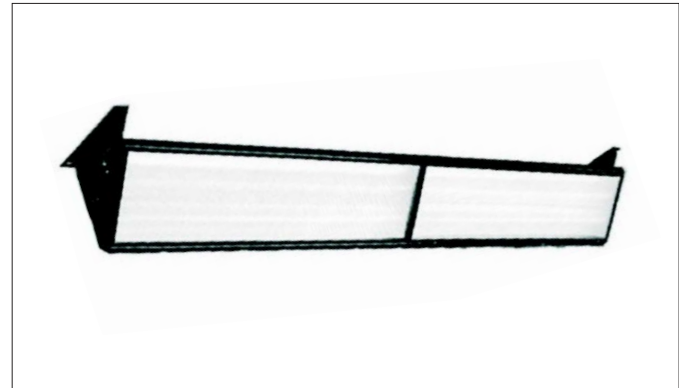

Applications: THEATERS - AUDITORIUMS

Designed to be used as an architectural wall or ceiling mounted floodlight, the ULAB provides a wide range of lighting solutions in an easy install and aim package. With the ability to illuminate an area from the sides rather than the top makes this energy efficient light source unique to the industry. This fixture is UL listed with many options available to help meet specific project needs.

Construction: All fixtures 100% Bench Tested

Housing: .032" Black Powder Coated Aluminum

Sockets: Rotor Locking Mini Bi-Pin

Brackets: .090" Black Powder Coated Aluminum

Reflector: Designed Specifically for Application:

Mirro4: 95% Reflectance Anodized .020" Alum. (Med, to High Mount)

White 91: 91% Reflectance White .020" Alum. (Low Mount)

MirroMatte: White Specular (Med. to High Mount) **New!**

Lens: A-12 Prismatic (Standard)

Lamp: T8 Extended Life 25 or 32 Watt

Ballasts: Instant Start T8 - High Ballast Factor (120-480v)

Warranty:

Lamp: 24,000 Hours **Ballast:** 5 Years

Reflector: 25 Years **Body:** 5 Years



Input Watts

2x32 (2 Lamp)
78 Watts
4x32 (4 Lamp)
156 Watts

Dimensions

8 Ft 4x32 (Pictured)

Length = 96.50" Width = 10.375" Height = 11"

4 Ft 2x32

Length = 48.25" Width = 10.375" Height = 11"


Controls / Options

- **Emergency Ballast:** Specify Type
- **Dimming Ballast:** Specify # of Lamps
- **A/B Switching:** Specify # of Lamps
- **Lens Frame:** .125" Clear Acrylic, A-12 Prismatic or Tempered Glass
- **Wire Guard:** Durable 14 Gauge Steel
- **Colors :** Black Powder Coated (Custom Colors May Be Available)

Standard Cord & Plugs



NEMA 5-15P = 120V Plug
NEMA L5-15P = 120V Twistlock
NEMA L7-15P = 277V Twistlock
NEMA L7-20P = 277V Twistlock
Standard SO cord length 3-6 ft

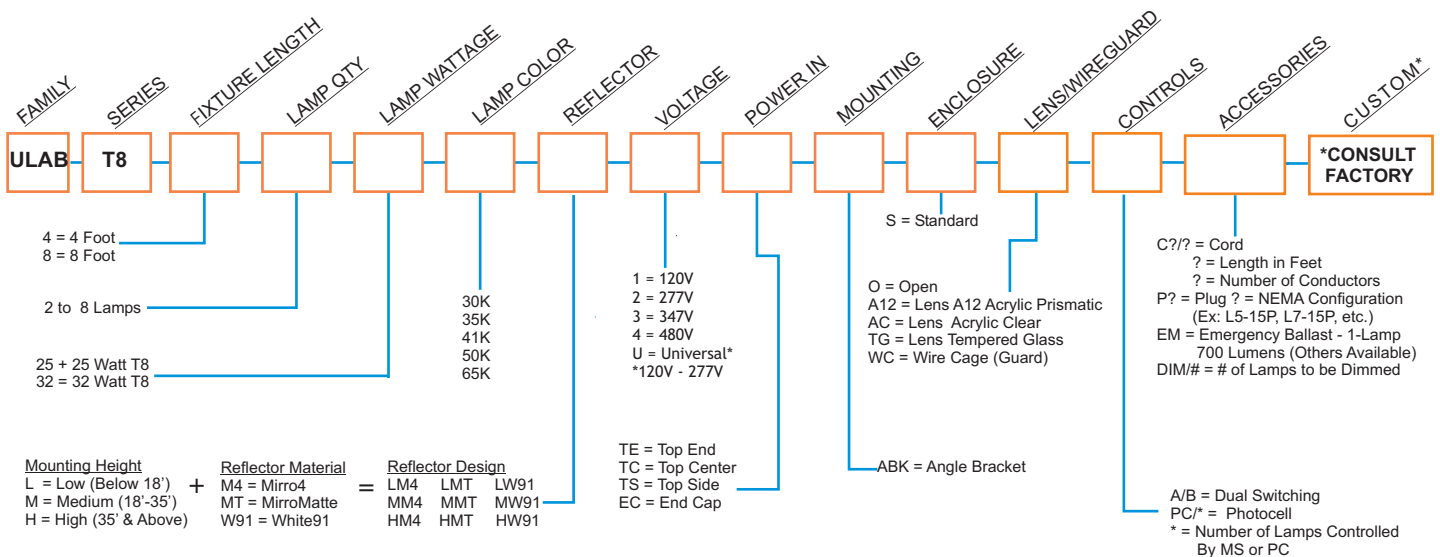

For further information, please call 530-887-1110 or email us at sales@1stsourcelight.com. We specialize in replacing all HID lighting systems with fluorescent. Contact us for a free quotation.